


## LED CCTV Monitor 21VED Display



### ADVANTAGES

- High Resolution: 1920 x 1080p Full HD
- Wide Viewing Area (H/V): 170° / 160°
- Clear Contrast Ratio: 1,000:1
- Fast Response Time: < 5ms
- Eco-Friendly Design, Low Power Consumption
- Multi Display Function: PIP / PBP / VOV
- BNC, S-Video, VGA, Component, DVI-D, HDMI, Audio, PC Stereo
- 3D Comb Filter, Deinterlacing, Trigger Source Switching, Noise Reduction, Auto Source Sequencing, Multi Language

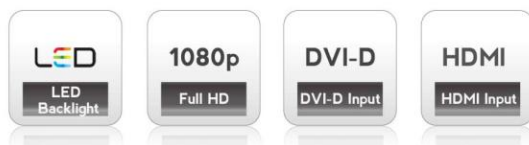

VuREX VED series monitors with LED BLU (backlight unit) benefit from intelligent color corrective technology with a mercury-free WLED back-light. In the long term the LED Monitor will benefit exceptional savings of up to 40% of energy costs.

### SPECIFICATIONS 21VED

<b>Display</b>	Screen Size	21.5"	<b>Features</b>	Filter Type	3D Comb Filter	
	Panel Resolution	1920 x 1080 @60Hz		Deinterlacing	Yes	
	Pixel Pitch	0.262 x 0.262 mm		Trigger Source Switching	Yes(NC)	
	Brightness (Typ.)	250 cd/m <sup>2</sup>		Noise Reduction	Yes	
	Contrast Ratio	1,000 : 1		Multi Display Function	PIP / PBP / VOV (Video on Video)	
	Aspect Ratio	16 : 9		Screen Protection	Optional	
	Viewing Angle (H/V)	170° / 160°		Auto Source Sequencing	Yes	
	Display Color	16.7 Million		Multi Language	English, Spanish, French, German, Italian	
	Response Time (Gray to Gray)	< 5ms		<b>Dimension</b>	Outline Dimension (W x H x D)	520 x 340 x 130mm
	Video System	NTSC / PAL			Net. Weight	6.4Kg
<b>Interface</b>	Video In / Out (BNC Type)	2 / 2	<b>Cabinet</b>	Color / Base Stand	Black / Yes	
	S-Video In	1		Case Material	Metal (Electronic galvanized Iron)	
	VGA In (15Pin D-Sub)	1	<b>Warranty</b>	Part/Labor	2year / 2year	
	Component In	2		MTBF (Approx.)	30,000 Hours	
	DVI-D In / HDMI In	1 / 2	<b>Regulations</b>	NRTL, FCC, CE, RoHS		
	Audio In (RCA Type)	3 (L + R)		<b>Power</b>	Consumption : < On	< 35W
	PC Stereo In	1	Electrical Ratings		AC100 ~ 240V(50/60Hz) DC 12V / 4.2A	
<b>Transmitter</b>	Remote Control	Yes	<b>Circumstance</b>	Operating Temperature	0~50°C	
	Built-In Speaker	Yes (2W x 2)		Storage Temperature	-20 ~ 60°C	
<b>Audio</b>			<b>Mount</b>	VESA™ Mount Size	100 x 100 mm	
				Mount Kit	Optional (Wall, Rack, Swing Arm)	

# LED CCTV Monitor 21VED Display


## OTHER VIEW



## FRONT VIEW




## REAR VIEW

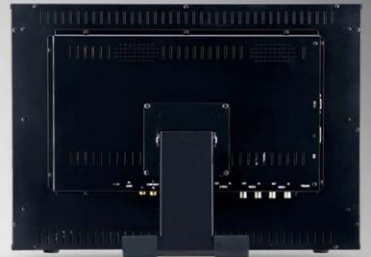


## SIDE VIEW




## DIMENSIONS



▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

**RN**Electronics