

Chassis Frame LED Monitor 185VICE Display



ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (100mm X 100mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz), DC 12V/4.2A
- Touch Screen Options: Resistive, Capacitive, SAW Touch
- 2 year warranty

VuREX VIC LCD/LED Chassis Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.

SPECIFICATIONS 185VICE

Display	Screen Size	18.5"	Dimension	Outline Dimension (WXHXD)	460mm X 290mm X 50mm
	Max. Resolution	1366 X 768 @ 60Hz		Net. Weight	TBA
	Panel Type	LED BLU	Cabinet	Cabinet Color	Black
	Pixel Pitch	0.100mm X 0.300 mm		Case Material	Metal(Electronic galvanized Iron)
	Luminance, White	250 cd/m ²	Warranty	Part/ Labor	2year / 2year
	Contrast Ratio	1,000:1	MTBF(Approx.)		50,000 Hours
	Viewing Angle(H/V)	178°/178°	Regulations		NRTL, FCC, CE, RoHS
	Support Color	16.7 Million	Power	Consumption : < On	<40W
	Response Time	< 9ms		Electrical Ratings	AC110 ~ 230V(50/60Hz) DC 12V / 3.5A
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃
	DVI-D In	1		Storage Temperature	-20℃ to 80℃
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	100mm X 100mm
			Option	Touch Sensor	Resistive, Capacitive, SAW Touch


Design and specifications are subject to change without notice

Chassis Frame LED Monitor 185VICE Display


OTHER VIEW



FRONT VIEW

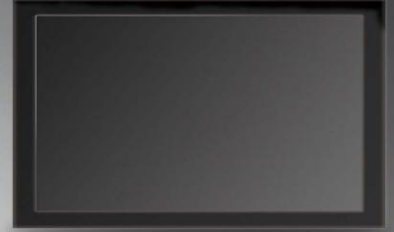

REAR VIEW

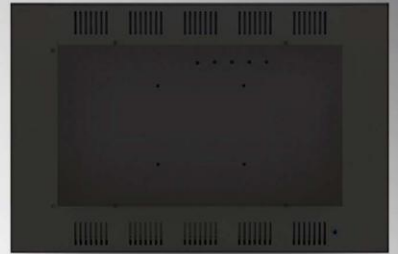


SIDE VIEW



DIMENSIONS



▲ FRONT VIEW

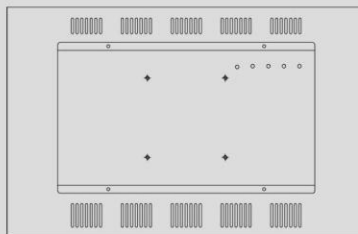

▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414. 172. LS-ro. Gunpo-si. Gyeonggi-do. 435-824. Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics