

Chassis Frame LED Monitor 42VICE Display



ADVANTAGES

- High Resolution: 1920 x 1080p Full HD
- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (400mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty

VuREX VIC LCD/LED Chassis Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting.

SPECIFICATIONS 42VICE

Display	Screen Size	42"	Dimension	Outline Dimension (WXHXD)	1,020mm X 610mm X 85mm		
	Panel Resolution	1920 X 1080 @ 120Hz		Net. Weight	TBA		
	Panel Type	LED BLU		Cabinet	Cabinet Color	Black	
	Pixel Pitch	0.4845 mm X 0.4845 mm			Case Material	Metal(Electronic galvanized Iron)	
	Luminance, White	360 cd/m ²		Warranty	Part/ Labor	2year / 2year	
	Contrast Ratio	1,400:1		MTBF(Approx.)		50,000 Hours	
	Viewing Angle(H/V)	178°/178°		Regulations			NRTL, FCC, CE, RoHS
	Support Color	16.7 Million		Power	Consumption : < On	< 123W	
	Response Time	< 6ms			Electrical Ratings	AC100~240V(50/60Hz)	
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃		
	DVI-D In	1		Storage Temperature	-20℃ to 80℃		
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	400mm X 200mm		
			Option	Touch Sensor	IR Touch		


Design and specifications are subject to change without notice

Chassis Frame LED Monitor 42VICE Display

OTHER VIEW



FRONT VIEW

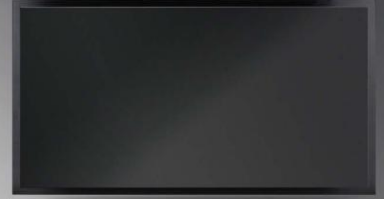


REAR VIEW




SIDE VIEW



DIMENSIONS

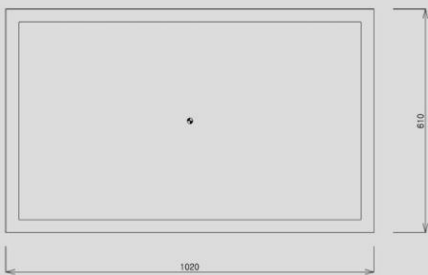

▲ FRONT VIEW

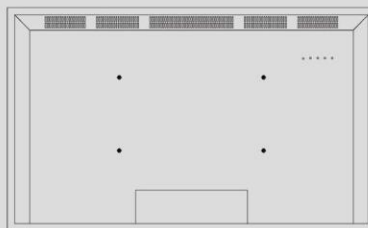

▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414. 172. LS-ro. Gunpo-si. Gyeonggi-do. 435-824. Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics