

Chassis Frame LCD Monitor 42VIC Display



ADVANTAGES

- High Resolution: 1920 x 1080p Full HD
- · Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (400mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warrnaty

VuREX VIC LCD/LED Chassis Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.

SPECIFICATIONS 42VIC


Display	Screen Size	42"
	Panel Resolution	1920 X 1080 @ 120Hz
	Panel Type	LCD
	Pixel Pitch	0.4845 mm X 0.4845 mm
	Luminance, White	450 cd/m ²
	Contrast Ratio	1,300:1
	Viewing Angle(H/V)	178°/178°
	Support Color	1.06 Billion
	Response Time	< 5ms
Interface	VGA In (15Pin D-Sub)	1
	DVI-D In	1
Audio	Built-In Speaker	N/A

Dimension	Outline Dimension (WXHXD)	1,020mm X 610mm X 85mm
	Net. Weight	ТВА
Cabinet	Cabinet Color	Black
	Case Material	Metal(Electronic galvanized Iron)
Warranty	Part/ Labor	2year / 2year
MTBF(Approx.)		50,000 Hours
Regulations		NRTL, FCC, CE, RoHS
Power	Consumption : < On	< 190W
	Electrical Ratings	AC100~240V(50/60Hz)
Circumstance	Operating Temperature	-30 ℃ to 70 ℃
	Storage Temperature	-20℃ to 80℃
Mount	VESA Size (HXV)	400mm X 200mm
Option	Touch Sensor	IR Touch

Chassis Frame LCD Monitor 42VIC Display



DIMENSIONS

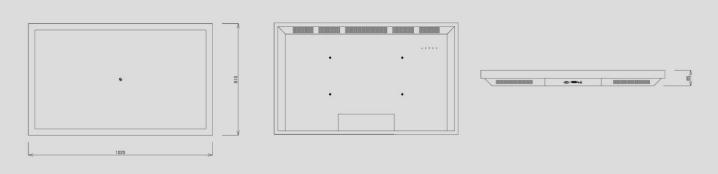

▲ REAR VIEW ▲ BOTTOM VIEW ▲ FRONT VIEW

