

Chassis Frame LCD Monitor 55VIC Display



ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (200mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warrnaty

VuREX VIC LCD/LED Chassis Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.


SPECIFICATIONS 55VIC

	Screen Size	55Inch
Display	Panel Resolution	1920 X 1080 @ 120Hz
	Panel Type	LED
	Pixel Pitch	0.630 mm X 0.630 mm
	Luminance, White	500 cd/m ¹ (Center,Typ))
	Contrast Ratio	'1100 :1
	Viewing Angle(H/V)	178°/178°
	Support Color	1.07 Billion colors
	Response Time	< 6msec (Typ.)
Interface	VGA In (15Pin D-Sub)	1
	DVI-D In	1
Audio	Built-In Speaker	N/A


	Outline Dimension (WXHXD)	1,320mm X 8,000mm X 110mm
Dimension	Net. Weight	ТВА
Cabinet	Cabinet Color	Black
	Case Material	Metal(Electronic galvanized Iron)
Warranty	Part/ Labor	2year / 2year
MTBF(Approx.)		50,000 Hours
Regulations		NRTL, FCC, CE, RoHSurs
Power	Consumption : < On	< 249W
	Electrical Ratings	AC100~240V(50/60Hz)
Circumstance	Operating Temperature	-30℃ to 70℃
	Storage Temperature	'-20℃ to 80℃
Mount	VESA Size (HXV)	600mm X 400mm
Option	Touch Sensor	IR Touch

Design and specifications are subject to change without notice

Chassis Frame LCD Monitor 55VIC Display

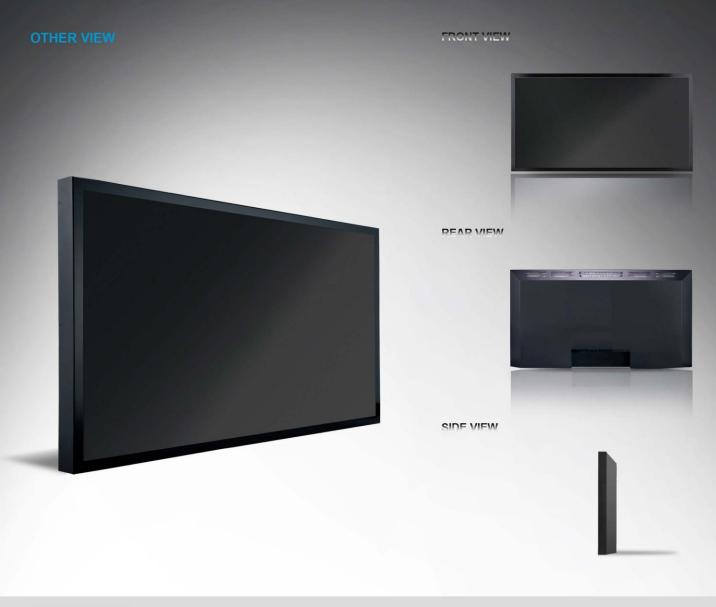

DIMENSIONS

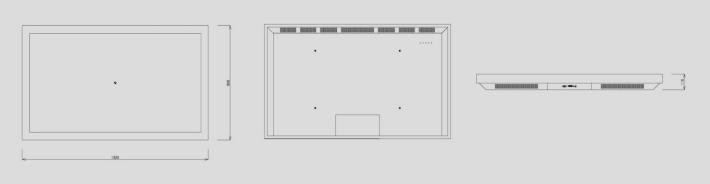

▲ FRONT VIEW ▲ REAR VIEW ▲ BOTTOM VIEW