

## CCTV Video Wall Monitor 55VCWS Display



### ADVANTAGES

- World Slimest Bezel Size: 5.5mm (Two Sides)
- High Resolution: 1920 x 1080 Full HD
- Clear Contrast Ratio: 3,500 : 1
- High Brightness: 700 cd/m<sup>2</sup>
- Wide Viewing Area (H/V): 178° / 178°
- Eco-Friendly Design, Vertical / Horizontal Display
- Easy to Use: RS-232C In & Out for Controlling the Monitors via Server / PC
- BNC, S-Video, VGA, Component, HDMI, DVI, Audio, PC Stereo, RS232C
- Multi Display Function (PIP / PBP / VOV)
- 3D Comb Filter, Trigger Source Switching, Auto Source Sequencing, Auto Power Recovery
- Various types of Mount Kits are available (Wall, Stand, Stand alone, Ceiling, Scissor)



VuREX VCW CCTV Video Walls are the ultra-slim high resolution video multivision.

This advanced LCD combination panel wall display system has benefits of high brightness and high definition, low power consumption and long lifespan.

VuREX VCW CCTV Video Walls are suitable for a wide range of applications: Emergency Operations Centers, traffic and surveillance centers, and utilities and process control rooms.

### SPECIFICATIONS 55VCWS


<b>Display</b>	Bezel Width	5.5mm (Two Sides)	<b>Features</b>	RS-232C Control	Serial Interface Control Program PC
	Active Display Area	1209.6 x 680.4mm		Filter Type	3D Comb Filter
	Screen Size	55"		Deinterlacing	Yes
	Panel Resolution	1920 x 1080 @60Hz		Noise Reduction	Yes
	Pixel Pitch	0.630 x 0.630 mm		Multi Display Function	PIP / PBP / VOV(Video On Video)
	Brightness	700cd/m <sup>2</sup>		Trigger Source Switching	Yes
	Contrast Ratio	3500 : 1		Auto Source Sequencing	Yes
	Viewing Angle (H/V)	178° / 178°		Auto Power Recovery	Yes
	Display Color	16.7 Million		Multi Language	English, Spanish, French, German, Italian
	Response Time (Gray to Gray)	< 8ms			
	Video System	NTSC / PAL			
<b>Interface</b>	Video In / Out (BNC Type)	2 / 2	<b>Dimension</b>	Outline Dimension (W x H x D)	1225 x 690 x 130 mm
	S-Video In	1		Net. Weight	TBA
	VGA In (15Pin D-Sub)	1	<b>Cabinet</b>	Bezel Color / Cabinet Color	Black / Black
	Component In	1		Case Material	Metal (Electronic galvanized Iron)
	HDMI In	2	<b>Warranty</b>	Part/Labor	2year / 2year
	DVI In	1		MTBF (Approx.)	50,000 Hours
	Audio In (RCA Type)	3(L+R)	<b>Regulations</b>		NRTL, FCC, CE, RoHS
	PC Stereo In	1	<b>Power</b>	Consumption : < On	< 330W
<b>Transmitter</b>	RS232C In / Out	1 / 1 Monitor OSD Control Using PC		Power Source	AC100 ~ 240V (50 / 60Hz))
	Remote Control	Yes	<b>Mount</b>	VESA™ Mount Size	400 x 200mm
<b>Audio</b>	Built-In Speaker	Yes (5W x 2)		Mount Kit	Optional (Wall, Stand, Stand alone, Ceiling, Scissor)

# CCTV Video Wall Monitor 55VCWS Display

## OTHER VIEW



## FRONT VIEW

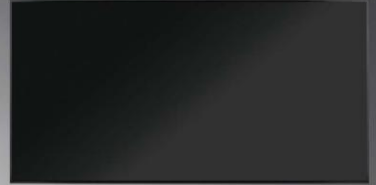


## REAR VIEW



## SIDE VIEW




## DIMENSIONS

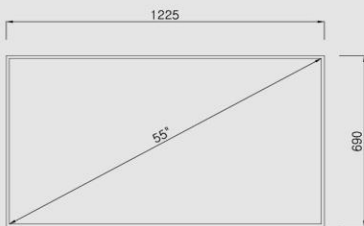


▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW