

CCTV Video Wall Monitor 65VCW Display



ADVANTAGES

- Slim Bezel Width: 25.2(H) / 27.7 (H)mm
- High Resolution: 1920 x 1080 Full HD
- Clear Contrast Ratio: 5,000:1
- High Brightness: 700 cd/m²
- Wide Viewing Area (H/V): 178° / 178°
- Eco-Friendly Design, Vertical / Horizontal Display
- Easy to Use: RS-232C In & Out for Controlling the Monitors via Server / PC
- BNC, S-Video, VGA, Component, HDMI, DVI, Audio, PC Stereo, RS232C
- Multi Display Function (PIP / PBP / VOV)
- 3D Comb Filter, Trigger Source Switching, Auto Source Sequencing, Auto Power Recovery
- Various types of Mount Kits are available (Wall, Stand, Stand alone, Ceiling, Scissor)



VuREX VCW CCTV Video Walls are the ultra-slim high resolution video multivision.

This advanced LCD combination panel wall display system has benefits of high brightness and high definition, low power consumption and long lifespan.

VuREX VCW CCTV Video Walls are suitable for a wide range of applications: Emergency Operations Centers, traffic and surveillance centers, and utilities and process control rooms.

SPECIFICATIONS 65VCW


Display	Bezel Width	25.2(H) / 27.7 (H)mm	Features	RS-232C Control	Serial Interface Control Program PC
	Active Display Area	1428.48 x 803.52 mm		Filter Type	3D Comb Filter
	Screen Size	65"		Deinterlacing	Yes
	Panel Resolution	1920 x 1080 @60Hz		Noise Reduction	Yes
	Pixel Pitch	0.744 x 0.744 mm		Multi Display Function	PIP / PBP / VOV(Video On Video)
	Brightness	700cd/m ²		Trigger Source Switching	Yes
	Contrast Ratio	5000 : 1		Auto Source Sequencing	Yes
	Viewing Angle (H/V)	178° / 178°		Auto Power Recovery	Yes
	Display Color	16.7 Million		Multi Language	English, Spanish, French, German, Italian
	Response Time (Gray to Gray)	< 8ms			
	Video System	NTSC / PAL			
Interface	Video In / Out (BNC Type)	2 / 2	Dimension	Outline Dimension (W x H x D)	1485 x 865 x 140mm
	S-Video In	1		Net. Weight	63Kg
	VGA In (15Pin D-Sub)	1	Cabinet	Bezel Color / Cabinet Color	Black / Black
	Component In	1		Case Material	Metal (Electronic galvanized Iron)
	HDMI In	2	Warranty	Part/Labor	2year / 2year
	DVI In	1		MTBF (Approx.)	50,000 Hours
	Audio In (RCA Type)	3(L+R)	Regulations		NRTL, FCC, CE, RoHS
	PC Stereo In	1			
Transmitter	RS232C In / Out	1 / 1 Monitor OSD Control Using PC	Power	Consumption : < On	< 500W
	Remote Control	Yes		Power Source	AC100 ~ 240V (50 / 60Hz))
Audio	Built-In Speaker	Yes (5W x 2)	Mount	VESA™ Mount Size	600 x 400mm
				Mount Kit	Optional (Wall, Stand, Stand alone, Ceiling, Scissor)

CCTV Video Wall Monitor 65VCW Display

OTHER VIEW



FRONT VIEW




REAR VIEW



SIDE VIEW




DIMENSIONS

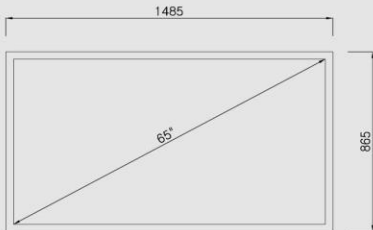


▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics