

## Open Frame LED Monitor 185VIOE Display

### ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (100mm X 100mm )
- Input Signal : VGA, DVI
- Input Power : AC110~230V(50/60Hz)
- Touch Screen Options: Resistive, Capacitive, SAW Touch
- 2 year warranty



VuREX VIO LCD/LED Open Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting

### SPECIFICATIONS 185VIOE

<b>Display</b>	Screen Size	18.5"
	Max. Resolution	1366 X 768 @ 60Hz
	Panel Type	LED BLU
	Pixel Pitch	0.100mm X 0.300 mm
	Luminance, White	250 cd/m <sup>2</sup>
	Contrast Ratio	1,000:1
	Viewing Angle(H/V)	178°/178°
	Support Color	16.7 Million
	Response Time	< 9ms
<b>Interface</b>	VGA In (15Pin D-Sub)	1
	DVI-D In	1
<b>Audio</b>	Built-In Speaker	N/A

<b>Dimension</b>	Outline Dimension (WXHXD)	472 X 300 X 50mm
	Net. Weight	TBA
<b>Cabinet</b>	Cabinet Color	Silver
	Case Material	Metal(Electronic galvanized Iron)
<b>Warranty</b>	Part/ Labor	2year / 2year
<b>MTBF(Approx.)</b>		50,000 Hours
<b>Regulations</b>		NRTL, FCC, CE, RoHS
<b>Power</b>	Consumption : < On	<40W
	Electrical Ratings	AC110 ~ 230V(50/60Hz) DC 12V / 3.5A
<b>Circumstance</b>	Operating Temperature	-30℃ to 70℃
	Storage Temperature	-20℃ to 80℃
<b>Mount</b>	VESA Size (HXV)	100mm X 100mm
<b>Option</b>	Touch Sensor	Resistive, Capacitive, SAW Touch

Design and specifications are subject to change without notice


# Open Frame LED Monitor 185VIOE Display

## OTHER VIEW


SIDE VIEW



## DIMENSIONS

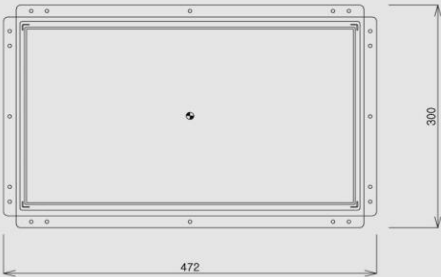

▲ FRONT VIEW

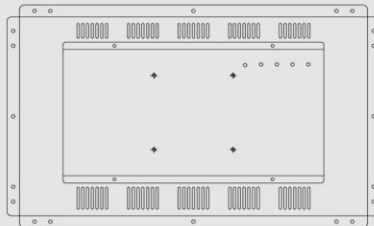

▲ REAR VIEW



▲ BOTTOM VIEW