

Open Frame LCD Monitor 55VIO Display



ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (600mm X 400mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty

VuREX VIO LCD/LED Open Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting

SPECIFICATIONS 55VIO

Display	Screen Size	55"
	Panel Resolution	1920 X 1080 @ 120Hz
	Panel Type	LCD
	Pixel Pitch	0.630 mm X 0.630 mm
	Luminance, White	500 cd/m ²
	Contrast Ratio	1,100:1
	Viewing Angle(H/V)	178°/178°
	Support Color	1.07 Billion
Response Time	< 6ms	
Interface	VGA In (15Pin D-Sub)	1
	DVI-D In	1
Audio	Built-In Speaker	N/A

Dimension	Outline Dimension (WXHxD)	1,340 x 800 x 90mm
	Net. Weight	TBA
Cabinet	Cabinet Color	Silver
	Case Material	Metal(Electronic galvanized Iron)
Warranty	Part/ Labor	2year / 2year
MTBF(Approx.)		50,000 Hours
Regulations		NRTL, FCC, CE, RoHS
Power	Consumption : < On	< 249W
	Electrical Ratings	AC100~240V(50/60Hz)
Circumstance	Operating Temperature	-30℃ to 70℃
	Storage Temperature	-20℃ to 80℃
Mount	VESA Size (HXV)	600mm X 400mm
Option	Touch Sensor	Resistive, Capacitive, SAW Touch

Design and specifications are subject to change without notice


Open Frame LCD Monitor 55VIO Display

OTHER VIEW


SIDE VIEW




DIMENSIONS

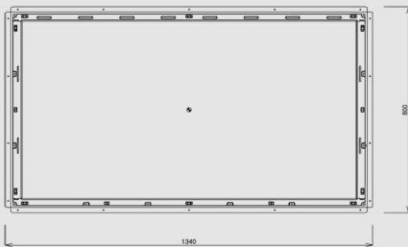

▲ FRONT VIEW

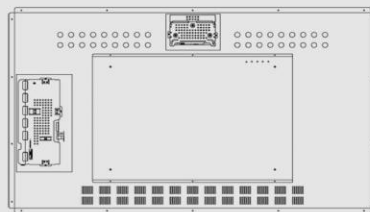

▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics