

Panel Frame LED Monitor 32VIPE Display



ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (200mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100 ~ 240V(50/60Hz)
- Touch Screen Options: SAW, IR Touch
- 2 year warranty

VuREX VIP LCD/LED Panel Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.

SPECIFICATIONS 32VIPE

Display	Screen Size	32"	Dimension	Outline Dimension (WXHxD)	850mm X 510mm X 85mm		
	Panel Resolution	1366X 768@ 60Hz		Net. Weight	TBA		
	Panel Type	LED BLU		Cabinet	Cabinet Color	Black	
	Pixel Pitch	170.25µm X 510.75 µm			Case Material	Metal(Electronic galvanized Iron)	
	Luminance, White	400 cd/m ²		Warranty	Part/ Labor	2year / 2year	
	Contrast Ratio	1,200:1		MTBF(Approx.)		50,000 Hours	
	Viewing Angle(H/V)	178°/178°		Regulations			NRTL, FCC, CE, RoHS
	Support Color	1.06 Billion		Power	Consumption : < On	< 85W	
	Response Time	< 5ms			Electrical Ratings	AC100~240V(50/60Hz)	
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃		
	DVI-D In	1		Storage Temperature	-20℃ to 80℃		
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	200mm X 200mm		
			Option	Touch Sensor	IR Touch		


Design and specifications are subject to change without notice

Panel Frame LED Monitor 32VIPE Display

OTHER VIEW



FRONT VIEW

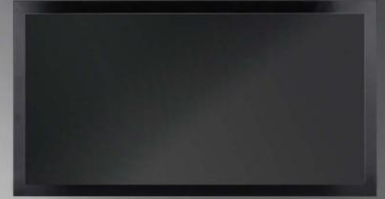

REAR VIEW




SIDE VIEW



DIMENSIONS



▲ FRONT VIEW

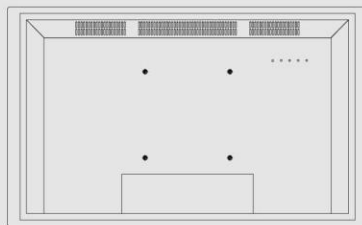

▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414. 172. LS-ro. Gunpo-si. Gyeonggi-do. 435-824. Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics