

## Panel Frame LCD Monitor 42VIP Display



### ADVANTAGES

- High Resolution: 1920 x 1080p Full HD
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (400mm X 200mm )
- Input Signal : VGA, DVI
- Input Power : AC100 ~ 240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty

VuREX VIP LCD/LED Panel Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.

### SPECIFICATIONS 42VIP

|                |                    |                       |                     |                           |                        |                                   |                     |
|----------------|--------------------|-----------------------|---------------------|---------------------------|------------------------|-----------------------------------|---------------------|
| <b>Display</b> | Screen Size        | 42"                   | <b>Dimension</b>    | Outline Dimension (WXHxD) | 1,070mm X 640mm X 90mm |                                   |                     |
|                | Panel Resolution   | 1920 X 1080 @ 120Hz   |                     | Net. Weight               | TBA                    |                                   |                     |
|                | Panel Type         | LCD                   |                     | <b>Cabinet</b>            | Cabinet Color          | Black                             |                     |
|                | Pixel Pitch        | 0.4845 mm X 0.4845 mm |                     |                           | Case Material          | Metal(Electronic galvanized Iron) |                     |
|                | Luminance, White   | 450 cd/m <sup>2</sup> |                     | <b>Warranty</b>           | Part/ Labor            | 2year / 2year                     |                     |
|                | Contrast Ratio     | 1,300:1               |                     | <b>MTBF(Approx.)</b>      |                        | 50,000 Hours                      |                     |
|                | Viewing Angle(H/V) | 178°/178°             |                     | <b>Regulations</b>        |                        |                                   | NRTL, FCC, CE, RoHS |
|                | Support Color      | 1.06 Billion          |                     | <b>Power</b>              | Consumption : < On     | < 190W                            |                     |
|                | Response Time      | < 5ms                 |                     |                           | Electrical Ratings     | AC100~240V(50/60Hz)               |                     |
|                | <b>Interface</b>   | VGA In (15Pin D-Sub)  |                     | 1                         | <b>Circumstance</b>    | Operating Temperature             | -30℃ to 70℃         |
| DVI-D In       |                    | 1                     | Storage Temperature | -20℃ to 80℃               |                        |                                   |                     |
| <b>Audio</b>   | Built-In Speaker   | N/A                   | <b>Mount</b>        | VESA Size (HXV)           | 400mm X 200mm          |                                   |                     |
|                |                    |                       | <b>Option</b>       | Touch Sensor              | IR Touch               |                                   |                     |


Design and specifications are subject to change without notice

# Panel Frame LCD Monitor 42VIP Display

## OTHER VIEW



## FRONT VIEW

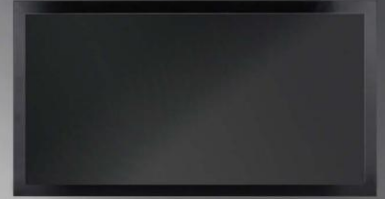

## REAR VIEW




## SIDE VIEW




## DIMENSIONS



▲ FRONT VIEW

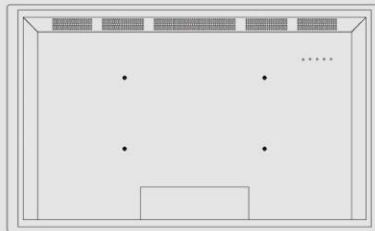

▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414. 172. LS-ro. Gunpo-si. Gyeonggi-do. 435-824. Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

**RN**Electronics