

Open Frame LED Monitor 32VIOE Display



ADVANTAGES

- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (200mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty

VuREX VIO LCD/LED Open Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting

SPECIFICATIONS 32VIOE

Display	Screen Size	32"	Dimension	Outline Dimension (WXHXD)	810 x 500 x 65mm		
	Panel Resolution	1366X 768@ 60Hz		Net. Weight	TBA		
	Panel Type	LED BLU		Cabinet	Cabinet Color	Silver	
	Pixel Pitch	170.25µm X 510.75 µm			Case Material	Metal(Electronic galvanized Iron)	
	Luminance, White	400 cd/m ²		Warranty	Part/ Labor	2year / 2year	
	Contrast Ratio	1,200:1		MTBF(Approx.)		50,000 Hours	
	Viewing Angle(H/V)	178°/178°		Regulations			NRTL, FCC, CE, RoHS
	Support Color	1.06 Billion		Power	Consumption : < On	< 85W	
	Response Time	< 5ms			Electrical Ratings	AC100~240V(50/60Hz)	
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃		
	DVI-D In	1		Storage Temperature	-20℃ to 80℃		
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	200mm X 200mm		
			Option	Touch Sensor	Resistive, Capacitive, SAW Touch		

Design and specifications are subject to change without notice


Open Frame LED Monitor 32VIOE Display

OTHER VIEW


SIDE VIEW



DIMENSIONS

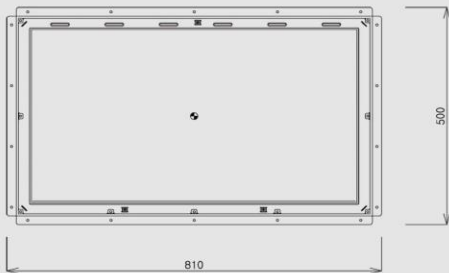

▲ FRONT VIEW

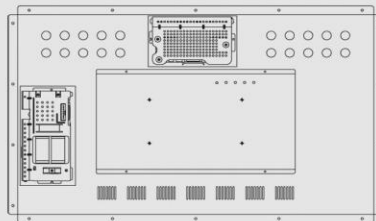

▲ REAR VIEW



▲ BOTTOM VIEW