

Open Frame LED Monitor 42VIOE Display



ADVANTAGES

- High Resolution: 1920 x 1080p Full HD
- LED Backlight Unit
- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (400mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty

VuREX VIO LCD/LED Open Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting

SPECIFICATIONS 42VIOE

Display	Screen Size	42"
	Panel Resolution	1920 X 1080 @ 120Hz
	Panel Type	LED BLU
	Pixel Pitch	0.4845 mm X 0.4845 mm
	Luminance, White	360 cd/m ²
	Contrast Ratio	1,400:1
	Viewing Angle(H/V)	178°/178°
	Support Color	1.06 Billion
Response Time	< 6ms	
Interface	VGA In (15Pin D-Sub)	1
	DVI-D In	1
Audio	Built-In Speaker	N/A

Dimension	Outline Dimension (WXHxD)	1,015 x 618 x 60mm
	Net. Weight	TBA
Cabinet	Cabinet Color	Silver
	Case Material	Metal(Electronic galvanized Iron)
Warranty	Part/ Labor	2year / 2year
MTBF(Approx.)		50,000 Hours
Regulations		NRTL, FCC, CE, RoHS
Power	Consumption : < On	< 123W
	Electrical Ratings	AC100~240V(50/60Hz)
Circumstance	Operating Temperature	-30℃ to 70℃
	Storage Temperature	-20℃ to 80℃
Mount	VESA Size (HXV)	400mm X 200mm
Option	Touch Sensor	Resistive, Capacitive, SAW Touch

Design and specifications are subject to change without notice


| Open Frame LED Monitor 42VIOE Display

OTHER VIEW


SIDE VIEW



DIMENSIONS

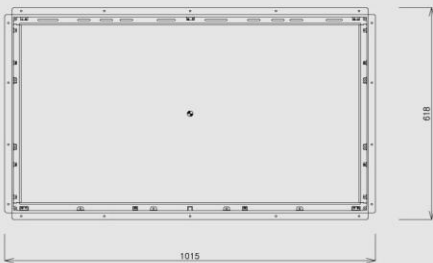

▲ FRONT VIEW

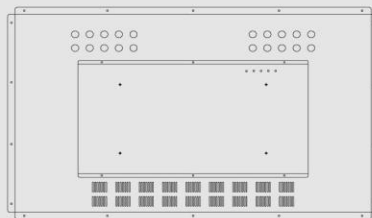

▲ REAR VIEW



▲ BOTTOM VIEW