

Sunlight Readable Indoor Monitor 55VSLH Display



ADVANTAGES

- High Resolution: 1920 x 1080 Full HD
- Wide Viewing Area (H/V): 178° / 178°
- Clear Contrast Ratio: 2,900:1
- Ultra High Brightness: 1,340 cd/m² (Indoor), 2,000 cd/m² (Outdoor)
- All Metal Cabinet, Eco-Friendly Design
- BNC, S-Video, VGA, Component, HDMI, DVI, Audio PC Stereo, RS-232C In / Out
- Multi Display Function (PIP / PBP / VOV),
- RS-232C Remote Control, Transflective Technology
- 3D Comb Filter, Trigger Source Switching, Auto Source Sequencing, Auto Power Recovery Multi Language OSD



Based on transflective technology, **VuREX VSL** Series Sunlight Readable Monitors provide the highest-quality sunlight readable image in indoor and outdoor environment for use in Retail - Shopping Mall, Digital Signage, commercial, ATM, industrial, security/surveillance, marine or military, amusement park and Public Displays.

SPECIFICATIONS 55VSLH


Display	Screen Size	55"	Features	RS-232C Control	Monitor OSD Control Using PC
	Panel Resolution	1920 x 1080 @60Hz		Transflective Enhancement	Yes
	Pixel Pitch	0.630 x 0.630 mm		Filter Type	3D Comb Filter
	Brightness (Indoor)	1,340 cd/m ² (Indoor)		Deinterlacing	Yes
	Brightness (Outdoor)	2,000 cd/m ² (Outdoor)		Noise Reduction	Yes
	Contrast Ratio	2,900 : 1		Multi Display Function	PIP / PBP / VOV(Video On Video)
	Aspect Ratio	16 : 9		Trigger Source Switching	Yes
	Viewing Angle (H/V)	178° / 178°		Auto Source Sequencing	Yes
	Display Color	16.7 Million		Auto Power Recovery	Yes
	Response Time (Gray to Gray)	< 22ms		Multi Language	English, Spanish, French, German, Italian
Interface	Video System	NTSC / PAL	Dimension	Outline Dimension (W x H x D)	49" x 28.1" x 5.34"
	Video In / Out (BNC Type)	2 / 2		Net. Weight	52Kg
	S-Video In	1	Cabinet	Bezel Color / Cabinet Color	Black / Black
	VGA In (15Pin D-Sub)	1		Case Material	Metal(Electronic galvanized Iron)
	Component In	1	Warranty	Part/Labor	2year / 2year
	HDMI In	2		MTBF (Approx.)	50,000 Hours
	DVI In	1	Regulations	NRTL, FCC, CE, RoHS	
	Audio In (RCA Type)	3(L+R)		Power	Consumption : < On
PC Stereo In	1	Power Source	AC100 ~ 240V (50 / 60Hz)		
Transmitter	RS232C In / Out	1 / 1 Max. ID ans Connection : 1~99 Max Cable Length (RS-232C) : 492'	Mount	VESA™ Mount Size	600 x 400mm
	Remote Control	Yes		Mount Kit	Optional (Wall, Rack, Swing Arm)
Audio	Built-In Speaker	Yes (4W x 2)			

| Sunlight Readable Monitor 55VSLH Display

OTHER VIEW



FRONT VIEW




REAR VIEW



SIDE VIEW




DIMENSIONS

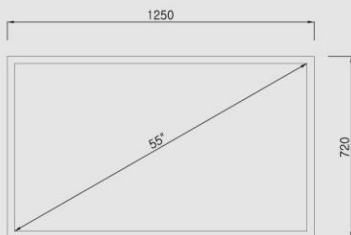

▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics