


## CCTV Monitor 42VCP120 Display



### ADVANTAGES

- High Resolution: 1920 x 1080 @120Hz
- Wide Viewing Area (H/V): 178° / 178°
- Clear Contrast Ratio: 1,400:1
- High Brightness: 500 cd/m<sup>2</sup>
- Fast Response Time: < 5ms
- All Metal Cabinet, Eco-Friendly Design
- BNC, S-Video, VGA, Component, HDMI, DVI, Audio, PC Stereo
- Designed for 24/7 and Panel life: 50,000 hours
- 3D Comb Filter, Deinterlacing, Noise Reduction, Trigger Source Switching, Auto Source Sequencing, Auto Power Recovery, Multi Language OSD

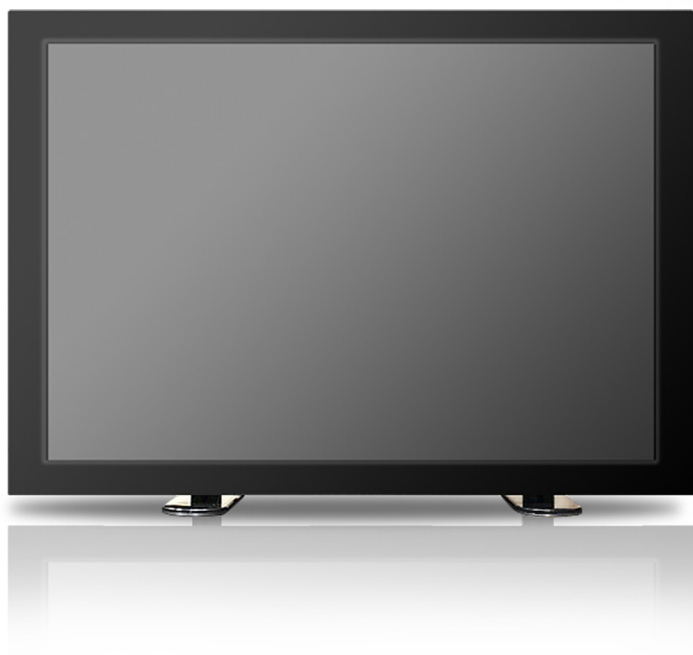

VuREX VCP Premium Series has various customer-friendly and features with PIP/PBP/VOV, metal cabinets, 3D Comb Filter.

VCP series offers excellent picture quality with a wide viewing angle and a sleek casing that maximises desktop space.

### SPECIFICATIONS 42VCP120

<b>Display</b>	Screen Size	42Inch
	Panel Resolution	1920 x 1080 @120Hz
	Pixel Pitch	0.484 x 0.484 mm
	Brightness (Typ.)	500cd/m <sup>2</sup> (Center,Typ)
	Contrast Ratio	1,400 : 1
	Aspect Ratio	16 : 9
	Viewing Angle (H/V)	178° / 178°
	Display Color	16.7 Million
	Response Time (Gray to Gray)	< 5ms(Typ)
	Video System	NTSC / PAL
<b>Interface</b>	Video In / Out (BNC Type)	2 / 2
	S-Video In	1
	VGA In (15Pin D-Sub)	1
	Component In	1
	HDMI In	2
	DVI In	1
	Audio In (RCA Type)	3(L+R)
PC Stereo In	1	
<b>Transmitter</b>	Remote Control	Yes
<b>Audio</b>	Built-In Speaker	Yes (5W x 2)

<b>Features</b>	Filter Type	3D Comb Filter
	Deinterlacing	Yes
	Noise Reduction	Yes
	Multi Display Function	PIP / PBP (VOV Support)
	Screen Protection	N / A
	Trigger Source Switching	Yes (NC)
	Auto Source Sequencing	Yes
	Auto Power Recovery	Yes
	Multi Language	English, Spanish, French, German, Italian
	<b>Dimension</b>	Outline Dimension (w/o stand) (W x H x D)
Outline Dimension (w/ stand) (W x H x D)		1,005 x 614 x 240 mm
Net. Weight		26Kg
<b>Cabinet</b>	Color / Base Stand	Black / Yes
	Case Material	Metal (Electronic galvanized Iron)
<b>Warranty</b>	Part/Labor	2year / 2year
	MTBF (Approx.)	50,000 Hours
<b>Regulations</b>		NRTL, FCC, CE, RoHS
<b>Power</b>	Consumption : < On	< 220W
	Electrical Ratings	AC100 ~ 240V(50/60Hz)
<b>Circumstance</b>	Operating Temperature	0~50°C
	Storage Temperature	-20 ~ 60°C
<b>Mount</b>	VESA™ Mount Size	400 x 200 mm
	Mount Kit	Optional (Wall, Rack, Swing Arm, Ceiling)