

## DID Video Wall Monitor 70VDW Display



### ADVANTAGES

- Slim Bezel Width: 38.4(H) /38.4(V) mm
- Ideal for Digital Signage Application
  - Spread Single image across multiple monitors using Single video source
  - Perfectly Integrated with VuREX DID Manager
  - Remotely Controlled via TCP/IP network
  - RS-232C In & Out for Controlling the Monitors via Server / PC
- Flexibility
  - Vertical / Horizontal Display
  - Configure up to a 10 x 10
  - Various types of Mount Kits are available (Wall, Stand, Stand alone, Ceiling, Scissor)



VuREX VDW DID Video Walls possess all the excellent DID technology, multiple image processing technology, signal switching technology.

VuREX VDW DID Video Walls are suitable for a wide range of applications: Retail stores(Restaurants, Cinemas and Theaters), Public Venues(Airports, Railway Stations, Shopping Malls), as well as Entertainment and Events ( Tradeshows, Conference Centers).

### SPECIFICATIONS 70VDW


<b>Display</b>	Bezel Width	38.4(H) /38.4(V) mm	<b>Features</b>	RS-232C Control	Serial Interface Control Program PC
	Active Display Area	1549.44 x 871.56 mm		Filter Type	3D Comb Filter
	Screen Size	70"		Deinterlacing	Yes
	Panel Resolution	1920 x 1080 @60Hz		Noise Reduction	Yes
	Pixel Pitch	0.807 x 0.807 mm		Multi Display Function	PIP / PBP / VOV(Video On Video)
	Brightness	600cd/m <sup>2</sup>		Trigger Source Switching	Yes
	Contrast Ratio	2000 : 1		Auto Source Sequencing	Yes
	Viewing Angle (H/V)	178° / 178°		Auto Power Recovery	Yes
	Display Color	16.7 Million		Multi Language	English, Spanish, French, German, Italian
	Response Time (Gray to Gray)	< 8ms			
	Video System	NTSC / PAL			
<b>Interface</b>	Video In / Out (BNC Type)	2 / 2	<b>Dimension</b>	Outline Dimension (W x H x D)	1,635 x 955 x 150 mm
	S-Video In	1	Net. Weight	85Kg	
	VGA In (15Pin D-Sub)	1	<b>Cabinet</b>	Bezel Color / Cabinet Color	Black / Black
	Component In	1		Case Material	Metal(Electronic galvanized Iron)
	HDMI In	2	<b>Warranty</b>	Part/Labor	2year / 2year
	DVI In	1		MTBF (Approx.)	50,000 Hours
	Audio In (RCA Type)	3(L+R)	<b>Regulations</b>	NRTL, FCC, CE, RoHS	
	PC Stereo In	1		<b>Power</b>	Consumption : < On
<b>Transmitter</b>	RS232C In / Out	1 / 1	<b>Mount</b>		VESA™ Mount Size
		Monitor OSD Control Using PC		Mount Kit	Optional (Wall, Stand, Stand alone, Ceiling, Scissor)
	Remote Control	Yes			
<b>Audio</b>	Built-In Speaker	Yes (5W x 2)			

# LED Video Wall Monitor 70VDW Display

## OTHER VIEW



## FRONT VIEW

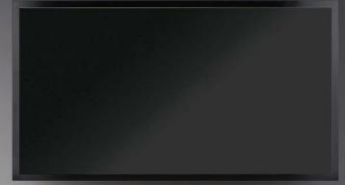


## REAR VIEW



## SIDE VIEW




## DIMENSIONS

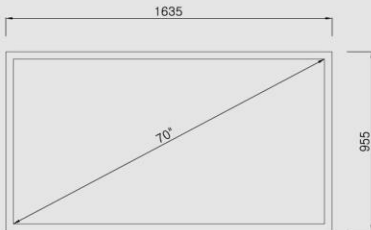

▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email [info@vurex.net](mailto:info@vurex.net) Website [www.vurex.net](http://www.vurex.net)

**RN**Electronics