

Chassis Frame LCD Monitor 47VIC Display

ADVANTAGES

- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (400mm X 200mm)
- Input Signal : VGA, DVI
- Input Power : AC100~240V(50/60Hz)
- Touch Screen Options: IR Touch
- 2 year warranty



VuREX VIC LCD/LED Chassis Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers.

They can be used in both indoor and outdoor environments.

They offer flexible options for touchscreen, signal interface and chassis mounting.

SPECIFICATIONS 47VIC

Display	Screen Size	47"	Dimension	Outline Dimension (WXHXD)	1,140mm X 690mm X 90mm	
	Panel Resolution	1920 X 1080 @ 120Hz		Net. Weight	TBA	
	Panel Type	LCD	Cabinet	Cabinet Color	Black	
	Pixel Pitch	0.5415 mm X 0.5415 mm		Case Material	Metal(Electronic galvanized Iron)	
	Luminance, White	500 cd/m ²	Warranty	Part/ Labor	2year / 2year	
	Contrast Ratio	800 :1	MTBF(Approx.)		50,000 Hours	
	Viewing Angle(H/V)	178°/178°	Regulations			NRTL, FCC, CE, RoHS
	Support Color	1.06 Billion	Power	Consumption : < On	< 240W	
	Response Time	< 8ms		Electrical Ratings	AC100~240V(50/60Hz)	
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃	
	DVI-D In	1		Storage Temperature	-20℃ to 80℃	
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	400mm X 200mm	
			Option	Touch Sensor	IR Touch	


Design and specifications are subject to change without notice

Chassis Frame LCD Monitor 47VIC Display

OTHER VIEW



FRONT VIEW

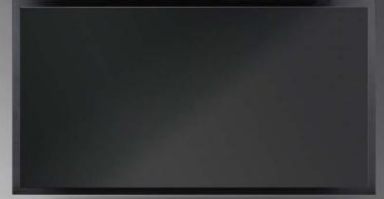

REAR VIEW




SIDE VIEW




DIMENSIONS



▲ FRONT VIEW

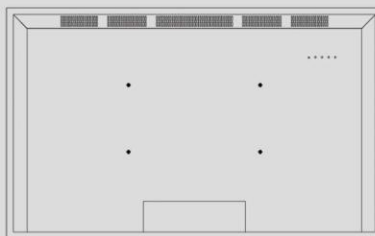

▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414. 172. LS-ro. Gunpo-si. Gyeonggi-do. 435-824. Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics